

(19) World Intellectual Property Organization
International Bureau




(43) International Publication Date
5 April 2001 (05.04.2001)

PCT

(10) International Publication Number
WO 01/23174 A1

- (51) International Patent Classification⁷: B32B 3/28, 13/04, 13/14
- (21) International Application Number: PCT/SE00/01830
- (22) International Filing Date:
20 September 2000 (20.09.2000)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
9903498-5 28 September 1999 (28.09.1999) SE
- (71) Applicant (for all designated States except US): AB CARL MUNTERS [SE/SE]; Box 430, S-191 24 Sollen-
tuna (SE).
- (72) Inventor; and
(75) Inventor/Applicant (for US only): VANGBO, Håkan
[SE/SE]; Gryningsvägen 6, S-177 61 Järfälla (SE).
- (74) Agents: LINDBERG, Åke et al.; Bergenstråhle & Lind-
vall AB, P.O. Box 17704, S-118 93 Stockholm (SE).
- (81) Designated States (national): JP, US.
- (84) Designated States (regional): European patent (AT, BE,
CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC,
NL, PT, SE).
- Published:
— With international search report.
- For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: METHOD FOR PRODUCING A LAMINATE

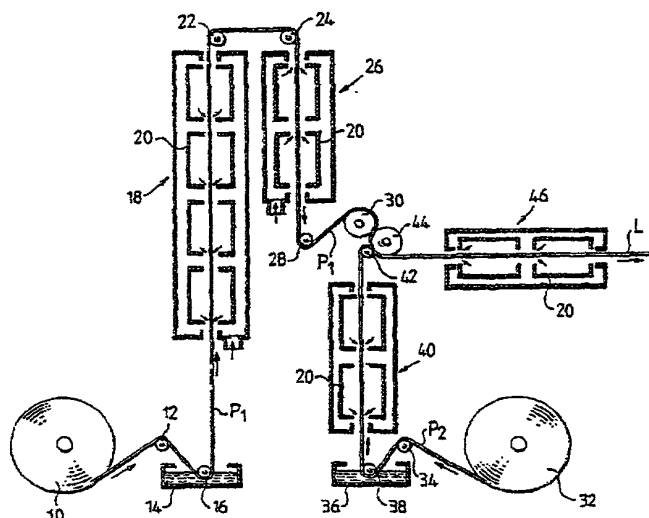

(57) Abstract: The present application relates to a method for producing a laminate comprised of alternating smooth and corrugated sheets and which are to form a corrugated structure for the manufacture of contactors, characterized by that a first starting material is impregnated with a solution comprising water glass and additive whereas the additive is present at a high level and which is later corrugated, and that a second starting material is impregnated with a solution comprising water glass and additive whereas the additive is present at a moderate level and that the both starting materials are brought together after the corrugation of the first starting material whereby the adhesion is maintained at a high level. The present application also relates to a laminate obtainable by said method and a contactor manufactured from a laminate obtainable by said method.

WO 01/23174 A1